

# Protective Boot Installation Methods for Traveling Nut Jacks.

Please fill in the required information on one of the following examples and return it to Joyce/Dayton via fax at 937-297-7173, or email to sales@joycedayton.com

JOYCE/DAYTON CORP. 3300 OFFICE PARK DRIVE DAYTON, OH 45439 PHONE 937-294-6261 FAX 937-294-7173


www.joycedayton.com



# Figure 1.

### Upright Keyed For Traveling Nut Jacks.

Machine Screw, ComDrive, or Bevel Gear Jacks.

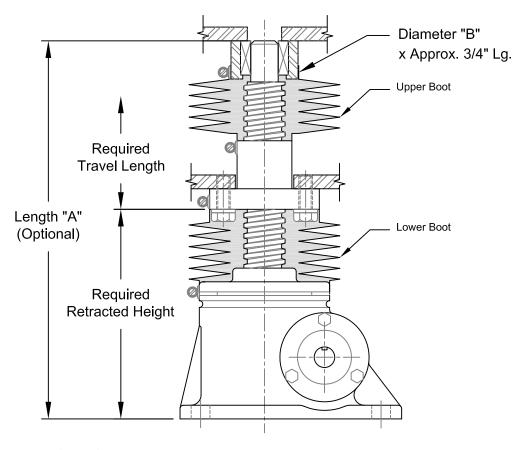


Specify if Upper, Lower, or E	Both Boots are Required	
Required Travel Length		
Required Retracted Height		
Length "A"	Diameter "B"	
Company Name		
P.O. Number		



# Figure 2.

### Upright Keyed For Traveling Nut Jacks.

Machine Screw, ComDrive, or Bevel Gear Jacks.

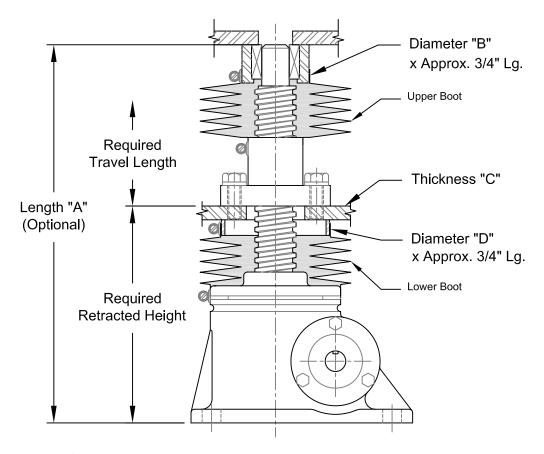


Specify if Upper, Lower, or Bo	oth Boots are F	Required
Required Travel Length		
Required Retracted Height _		
Length "A"	Diameter "B"	
Thickness "C"	Diameter "D"	
Company Name		
P O Number		



# Figure 3.

### Upright Keyed For Traveling Nut Jacks.

Machine Screw, ComDrive, or Bevel Gear Jacks.

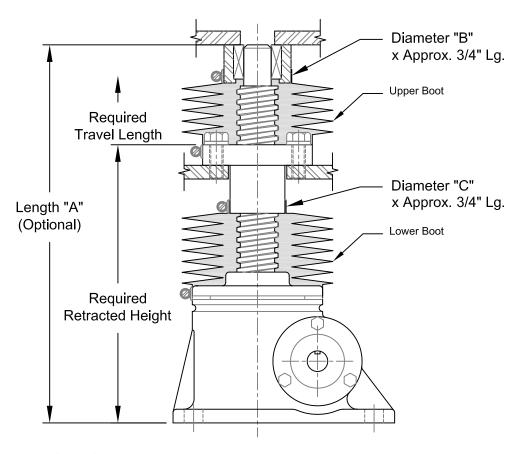


Specify if Upper, Lower, o	or Both Boots are Required
Required Travel Length <sub>-</sub>	
Req'd. Retracted Height	Length "A"
Diameter "B"	Diameter "C"
Company Name	
P O Number	



# Figure 4.

### Upright Keyed For Traveling Nut Jacks.

Machine Screw, ComDrive, or Bevel Gear Jacks.

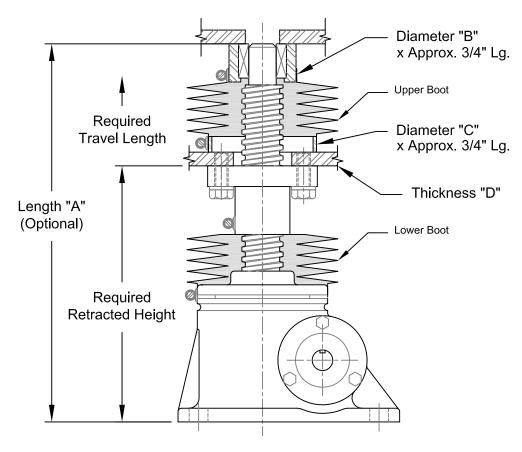


Specify if Upper, Lower, or E	Both Boots are I	Required
Required Travel Length		
Required Retracted Height		
Length "A"	Diameter "B"	
Diameter "C"	Thickness "D"	
Company Name		
P.O. Number		



# Figure 5.

### Inverted Keyed For Traveling Nut Jacks.

Machine Screw, ComDrive, or Bevel Gear Jacks.

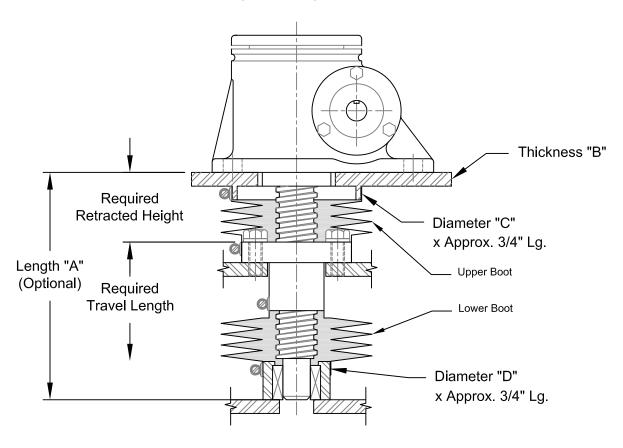


Specify if Upper, Lower, or B	oth Boots are Required	
Required Travel Length		
Required Retracted Height		
Length "A"	Thickness "B"	
Diameter "C"	Diameter "D"	
Company Name		
P.O. Number		



# Figure 6.

### Inverted Keyed For Traveling Nut Jacks.

Machine Screw, ComDrive, or Bevel Gear Jacks.

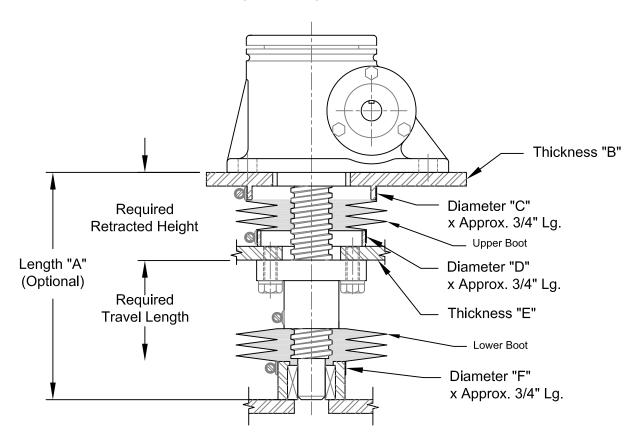

#### Specify Dimensions in Inches

Specify if Upper, Lower, or Both Boots are Required		
Required Travel Le	ngth	_
Required Retracted	d Height	_
Length "A"	_ Thickness "B"	Diameter "C"
Diameter "D"	Thickness "E"	Diameter "F"

Company Name \_\_\_\_\_


P.O. Number \_\_\_\_\_



# Figure 7.

### Inverted Keyed For Traveling Nut Jacks.

Machine Screw, ComDrive, or Bevel Gear Jacks.

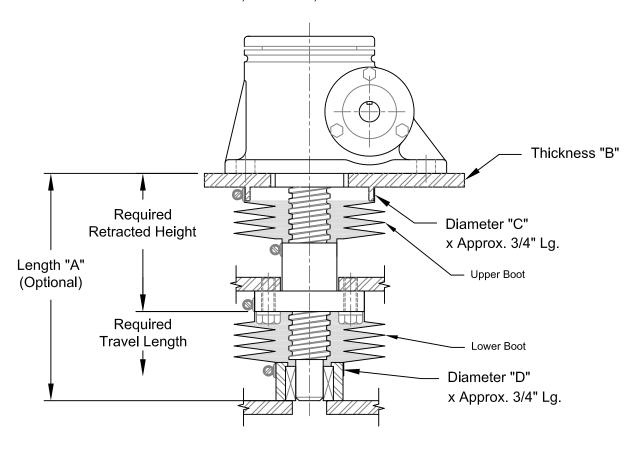


Specify if Upper, Lower, or B	oth Boots are Required	
Required Travel Length		
Required Retracted Height		
Length "A"	Thickness "B"	
Diameter "C"	Diameter "D"	
Company Name		
P.O. Number		



# Figure 8.

### Inverted Keyed For Traveling Nut Jacks.

Machine Screw, ComDrive, or Bevel Gear Jacks.

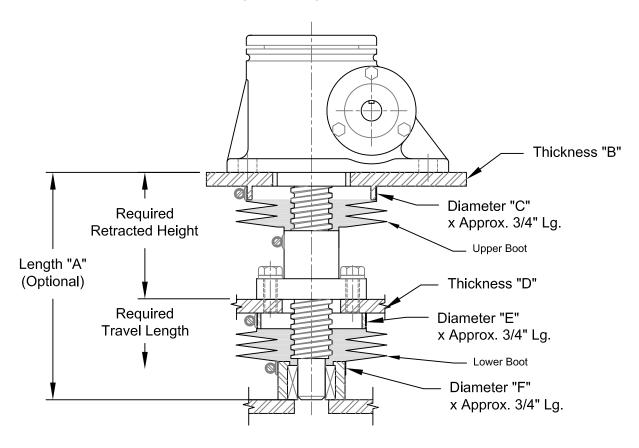

#### Specify Dimensions in Inches

P.O. Number \_\_\_\_\_

Specify if Upper, Lov	wer, or Both Boots a	are Required
Required Travel Ler	igth	
Required Retracted	Height	
Length "A"	Thickness "B"	Diameter "C"
Thickness "D"	Diameter "E" _	Diameter "F"
Company Name		